


中央驱动减速电机 Helical Center Drive Gearmotors



安装图 Dimensional Drawing

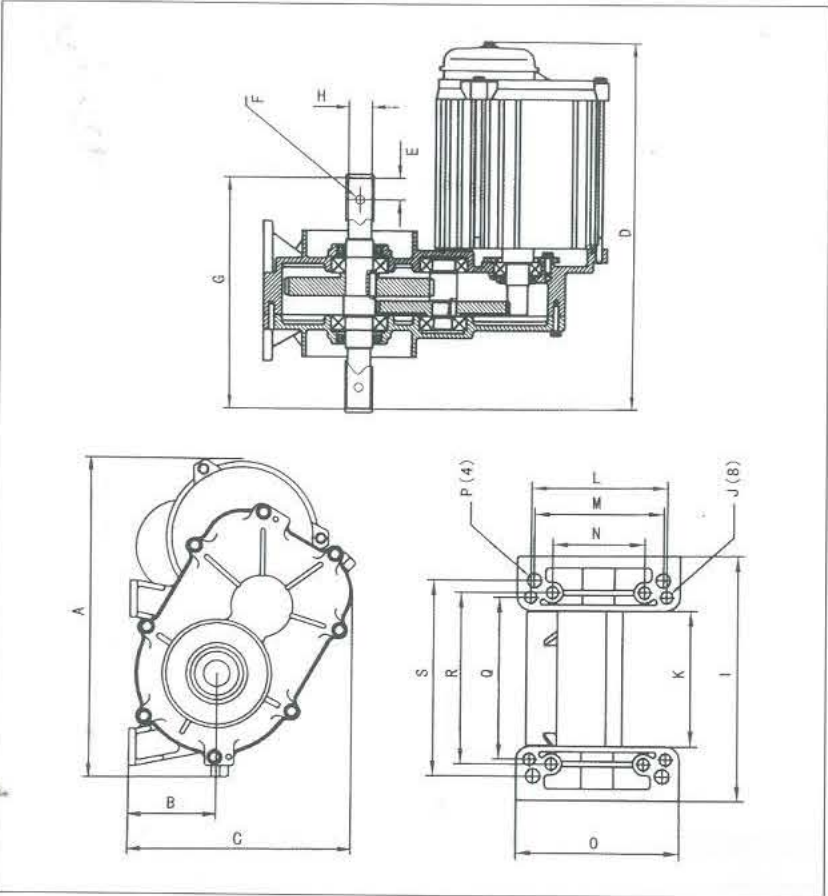

安装尺寸 Installation Dimension

型号 Model	A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S
G75-34	14.37	3.850	9.91	15.63	0.937	0.377	9.882	1.00	9.06	0.453	5.02	5.000	4.750	3.386	5.984	0.531	6.000	6.358	7.25
G75-43	14.37	3.850	9.91	15.63	0.937	0.377	9.882	1.00	9.06	0.453	5.02	5.000	4.750	3.386	5.984	0.531	6.000	6.358	7.25
G10-34	13.70	3.882	9.91	18.48	0.941	0.382	9.803	1.00	8.35	0.433	4.960	5.000		3.429	5.827		6.000	6.380	7.25
G15-34	14.37	3.850	9.91	16.42	0.937	0.377	9.882	1.00	9.06	0.453	5.02	5.000	4.750	3.386	5.984	0.531	6.000	6.358	7.25
G15-43	14.37	3.850	9.91	16.42	0.937	0.377	9.882	1.00	9.06	0.453	5.02	5.000	4.750	3.386	5.984	0.531	6.000	6.358	7.25
G15-57	14.37	3.850	9.91	16.42	0.937	0.377	9.882	1.00	9.06	0.453	5.02	5.000	4.750	3.386	5.984	0.531	6.000	6.358	7.25
G15-68	14.37	3.850	9.91	15.63	0.937	0.377	9.882	1.00	9.06	0.453	5.02	5.000	4.750	3.386	5.984	0.531	6.000	6.358	7.25
G15-86	14.37	3.850	9.91	15.63	0.937	0.377	9.882	1.00	9.06	0.453	5.02	5.000	4.750	3.386	5.984	0.531	6.000	6.358	7.25

技术参数 Performance Date


型号 Model	马力 HP	电机转速 RPM			传动比 Ratio	输出转速 Output RPM			输出扭矩 Output Torque			重量 Weight (kg/lbs)
		(460V)	(415V)	(380V)		(460V)	(415V)	(380V)	(460V)	(415V)	(380V)	
G75-34	0.75	1720	1420	1420	50:1	34	28	28	157.3 Nm	172.3 Nm	157.8 Nm	25.0/55
G75-43	0.75	1720	1420	1420	40:1	43	35	35	124.4 Nm	137.8 Nm	126.2 Nm	25.0/55
G10-34	1.00	1720	1420	1420	50:1	34	28	28	210.6 Nm	229.5 Nm	210.2 Nm	28.0/62
G15-34	1.50	1720	1420	1420	50:1	34	28	28	314.6 Nm	344.6 Nm	315.5 Nm	27.7/61
G15-43	1.50	1720	1420	1420	40:1	43	35	35	248.7 Nm	275.7 Nm	252.4 Nm	27.7/61
G15-57	1.50	1720	1420	1420	30:1	57	47	47	187.6 Nm	205.3 Nm	188.0 Nm	25.0/55
G15-68	1.50	3440	2840	2840	50:1	68	57	57	157.3 Nm	169.3 Nm	155.0 Nm	26.8/59
G15-86	1.50	3440	2840	2840	40:1	86	71	71	124.4 Nm	135.9 Nm	124.4 Nm	26.8/59

另一种 8.7 in

中央蜗轮驱动减速器 Worm Gear Center Drive



传动轴联轴器 Drive Line Coupler

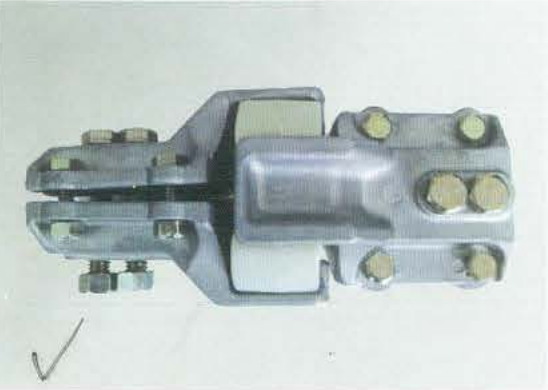


技术参数 Performance Date


型号 Model	组件描述 Assy Description
CPL-011-I	1.125" R&1" x 2Ends
CPL-011-G	1" R&7/8" Sq x 1.125" R&1" Sq
CPL011-M	1" R&7/8" Sq Tow x 2Ends

技术参数 Performance Date

型号 Model	传动比 Ratio	输出转速 Output Speed	中心距 Center Distance	重量 Weight (Kg)	油量 Oil Capacity
HCD-1-30	30	58	2.69"	7.3	1.2L
HCD-1-40	40	43	2.69"	7.3	1.2L
HCD-1-50	50	35	2.69"	7.3	1.2L
HCD-1-60	60	29	2.69"	7.3	1.2L

安装图 Dimensional Drawing

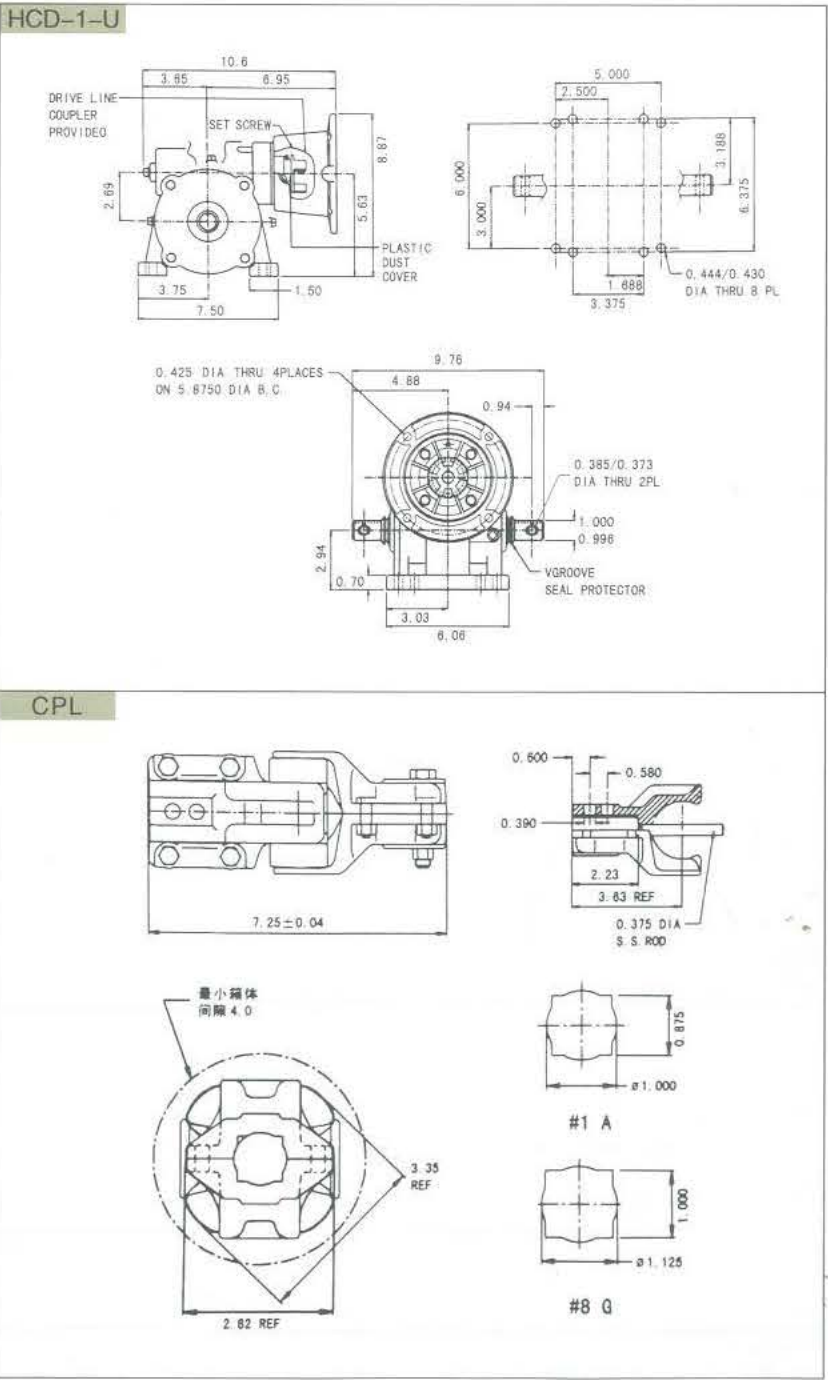

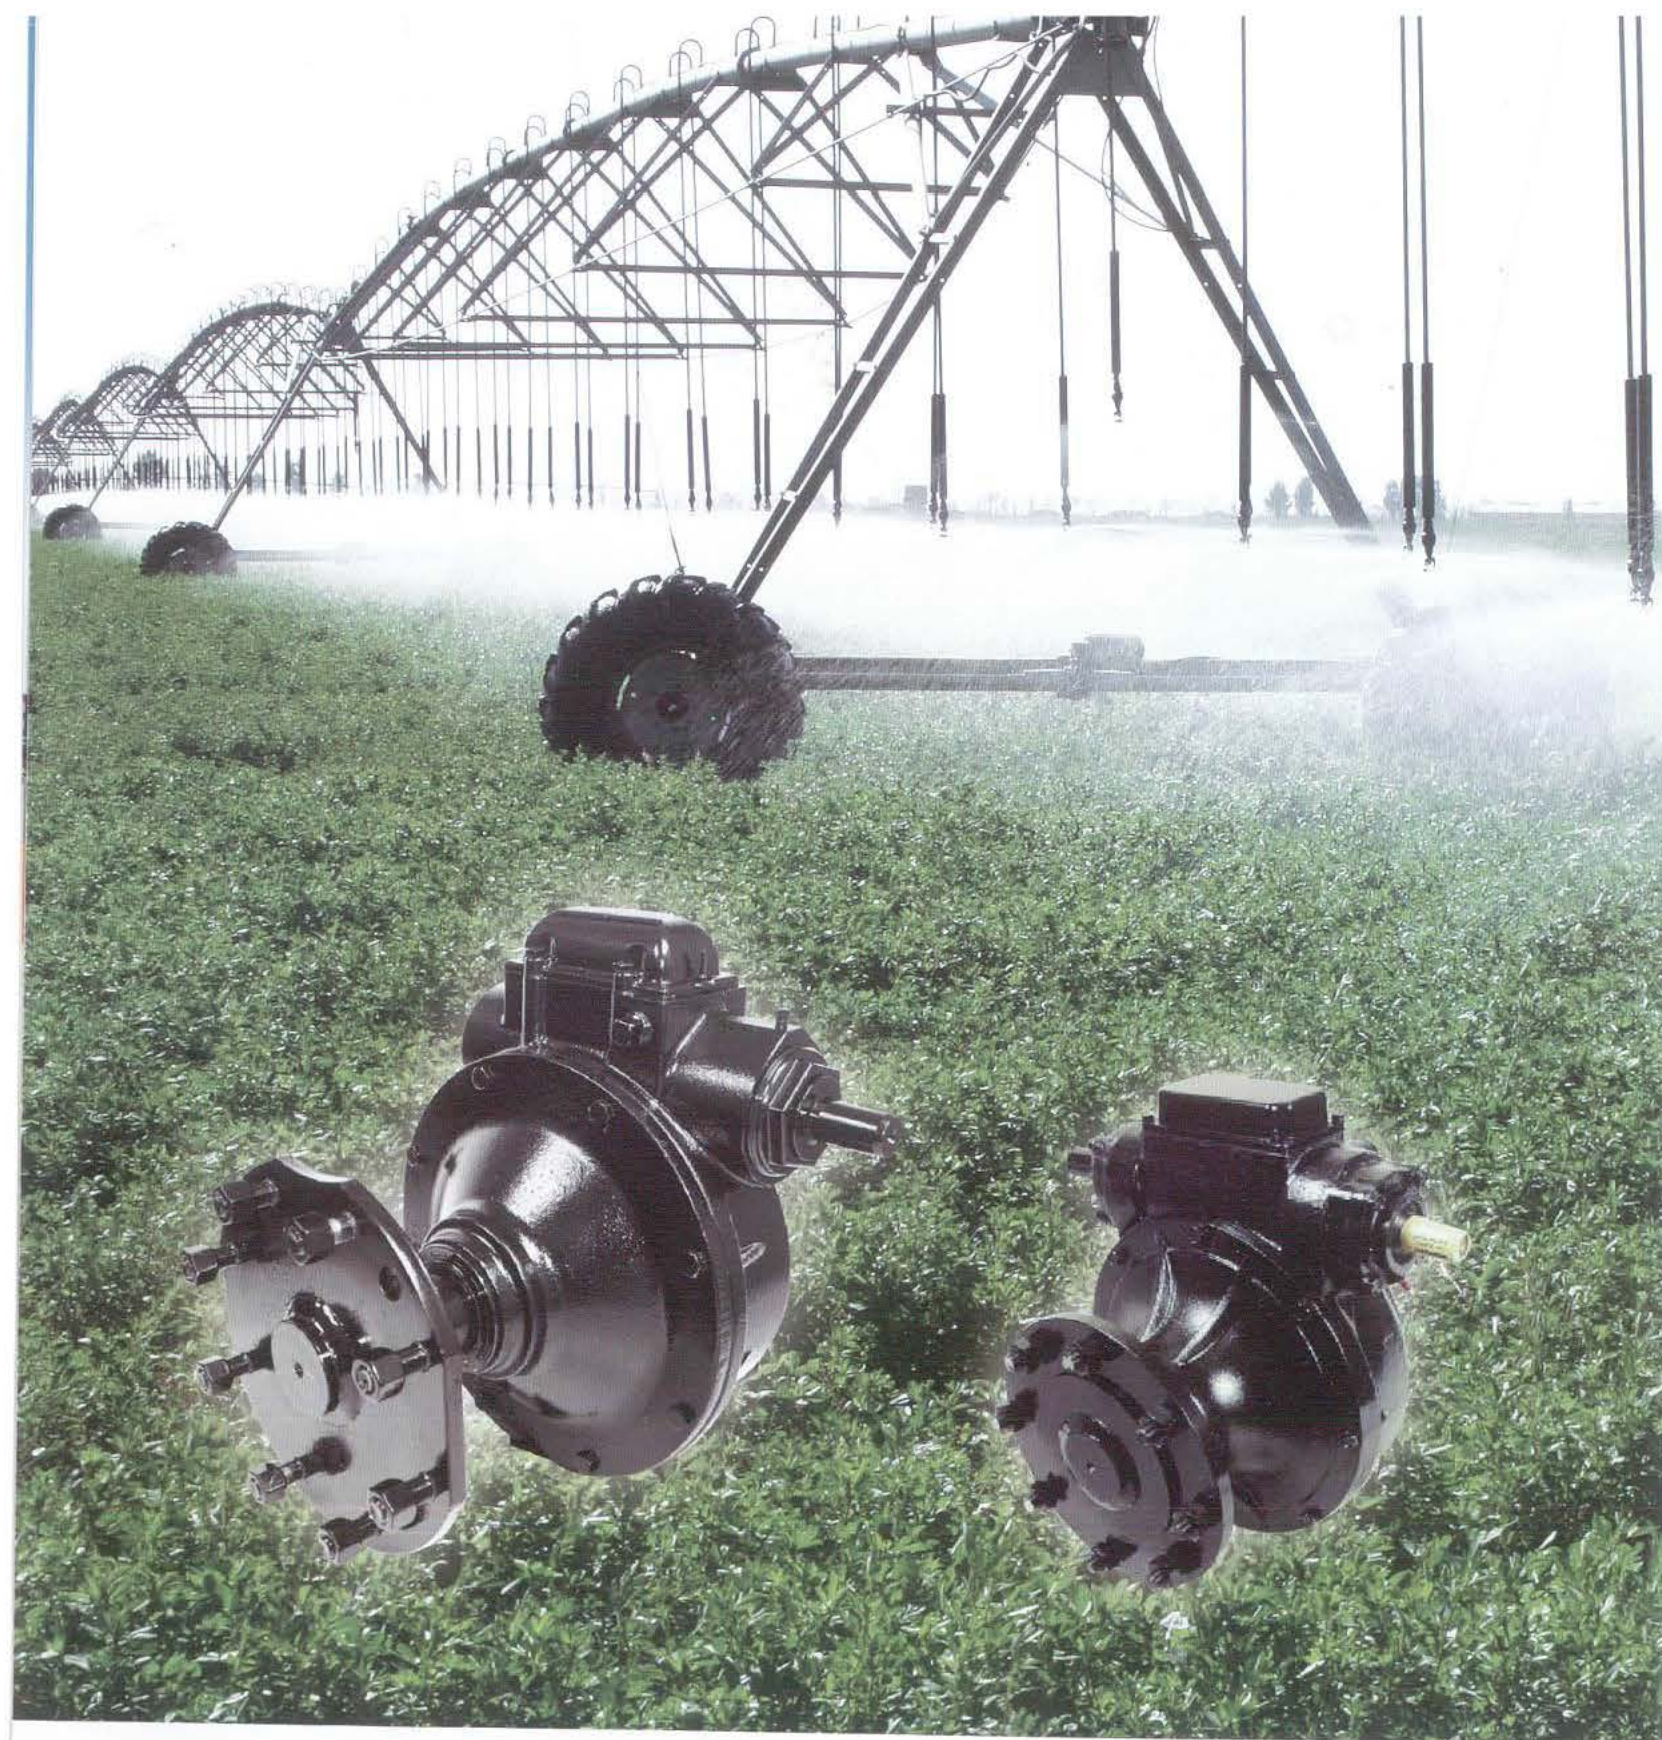





行走车轮驱动减速机 Wheel Drive Gearbox

安装图 Dimensional Drawing







技术参数 Performance Date

型号 Model	速比 Ratio	输出轴径 Shaft Size	重量 kg	扭矩 Torque
W7824	50:1	2.25"	50	7909Nm
W7786	52:1	2.25"	53	7909Nm
W7967	50:1	2.25"	55	7909Nm
W7826	52:1	2.25"	60	7909Nm

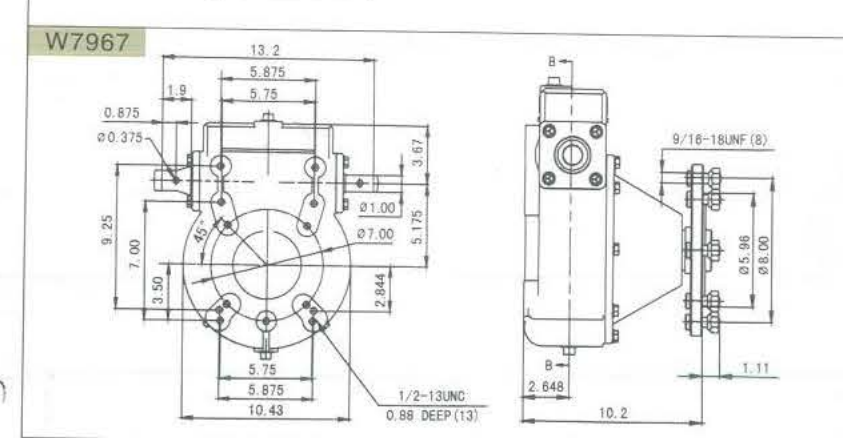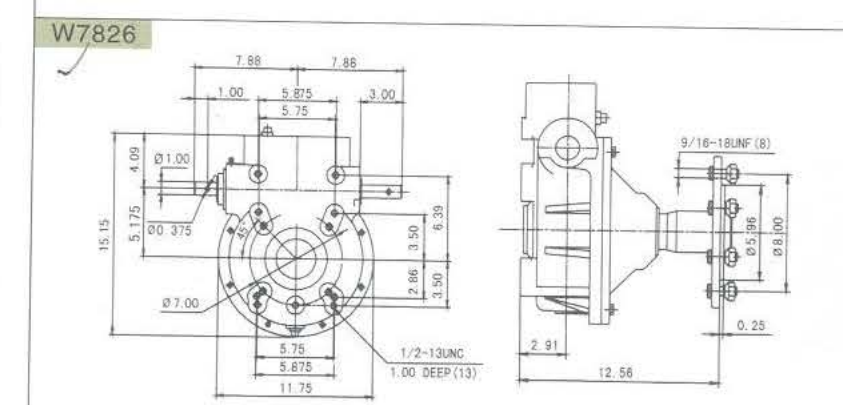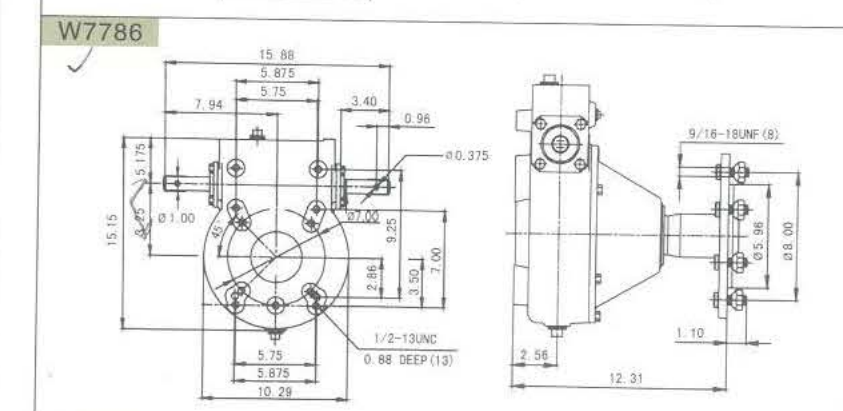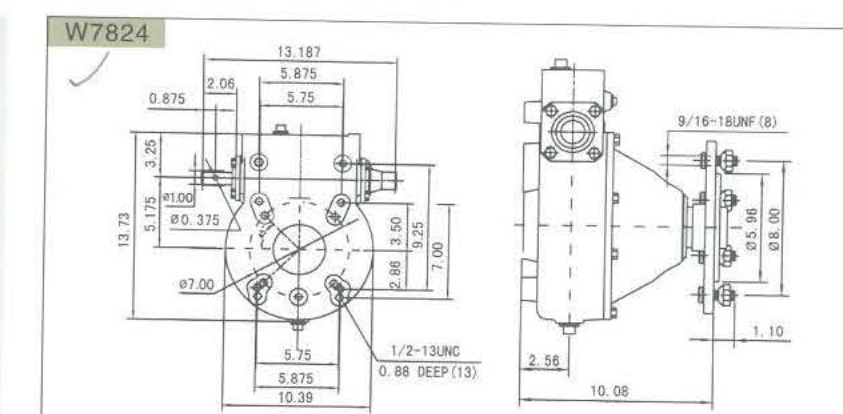
$$28 \times 25.4 = 57 \text{ mm}$$

行走车轮驱动减速机 Wheel Drive Gearbox

安装图 Dimensional Drawing

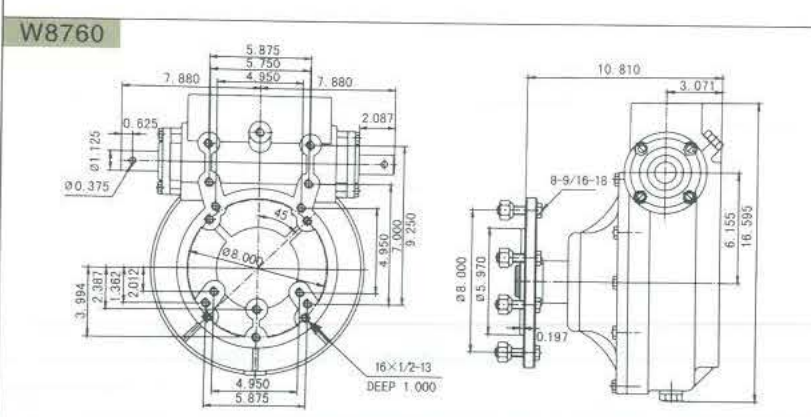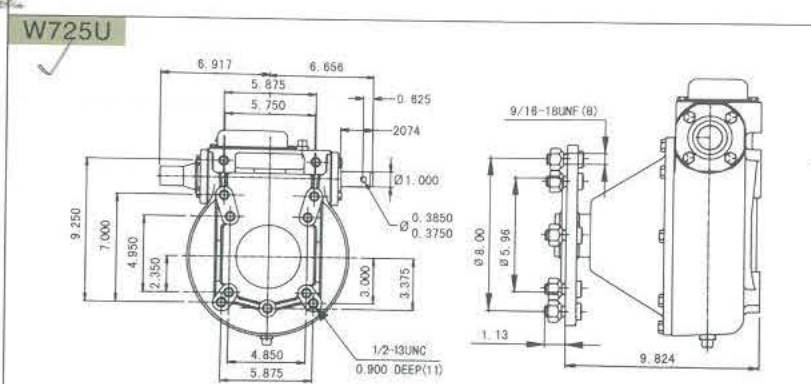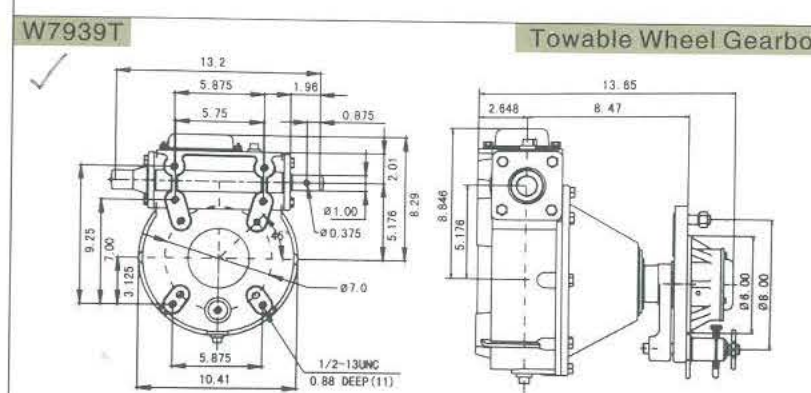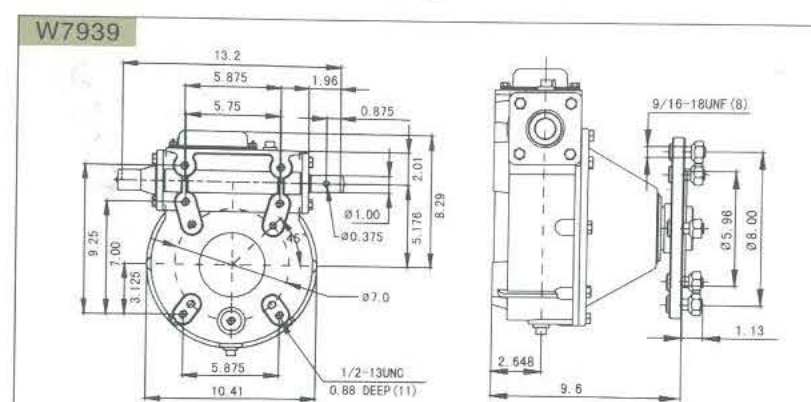

技术参数 Performance Date

型号 Model	速比 Ratio	输出轴径 Shaft Size	重量 kg	扭矩 Torque
W7939	50:1	2.25"	53	7909Nm
W7939T	50:1	2.25"	60	7909Nm
W725U	50:1	2.25"	50	7909Nm
W8760	50:1	2.25"	79	10170Nm



7739T


行走车轮驱动减速机 Wheel Drive Gearbox



技术参数 Performance Data

型号 Model	速比 Ratio	输出轴径 Shaft Size	重量 kg	扭矩 Torque
W740U	50:1	2.25"	51	7909Nm
W740UV	52:1	2.25"	54	7909Nm
TNT2U	50:1	2.25"	55	7909Nm
TNT2UV	52:1	2.25"	57	7909Nm

安装图 Dimensional Drawing

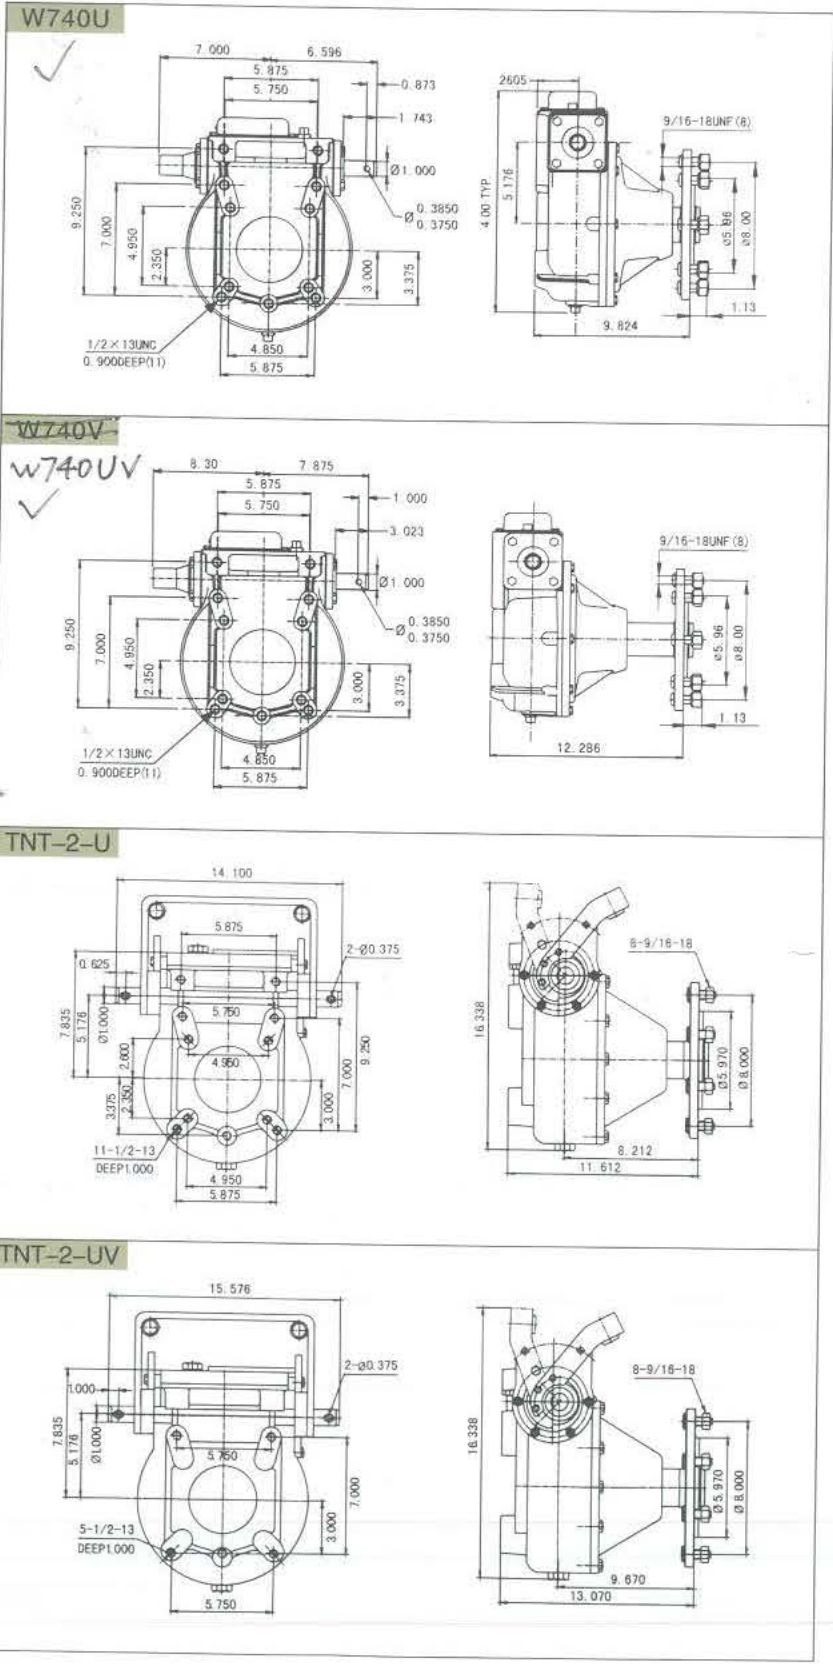

其他辅助配件 Other Auxiliary Parts

拖移装置 Towable Conversion Kits



联轴器护套及传动轴护套
Coupling sleeve & drive shaft sleeve




喷灌机喷头弯管 Pivot Drop Elbow



喷灌机轮胎 Pivot Tirs



安装图 Dimensional Drawing

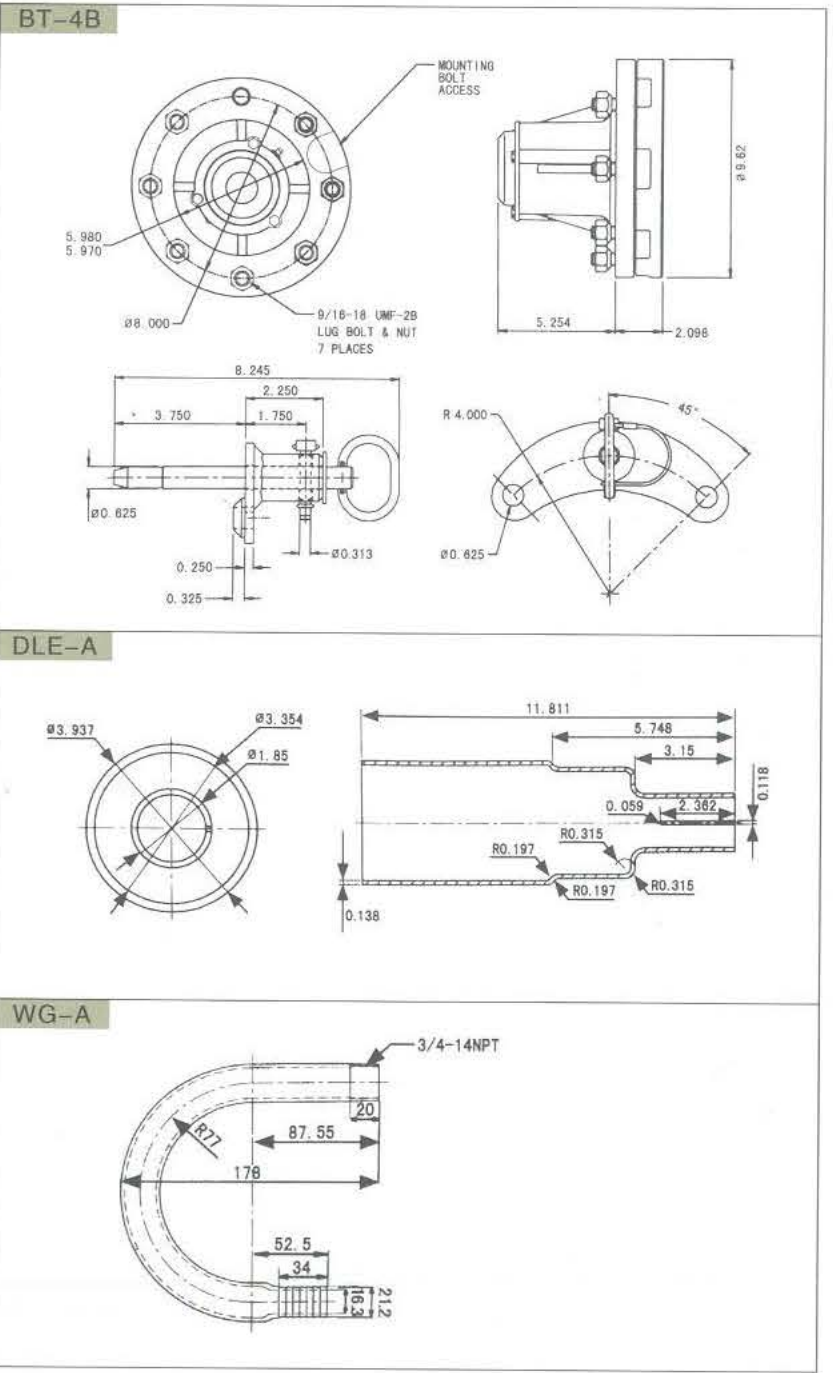

技术参数 Performance Data

规格 Specification	中心孔尺寸 Central Hole Dimension	螺孔尺寸 Nut Hole Dimension	分布圆直径 Chart Diameter	偏距 Deviating Distance	配套轮胎 Accessorial Tire
W10 x 24	152.4	8-φ16.7	203.2	-50.8	11.2-24
W12 x 24	152.4	8-φ16.7	203.2	0	14.9-24
W10 x 38	152.4	8-φ16.7	203.2	-44	11.2-38